


ELEVATION C.



ELEVATION A.

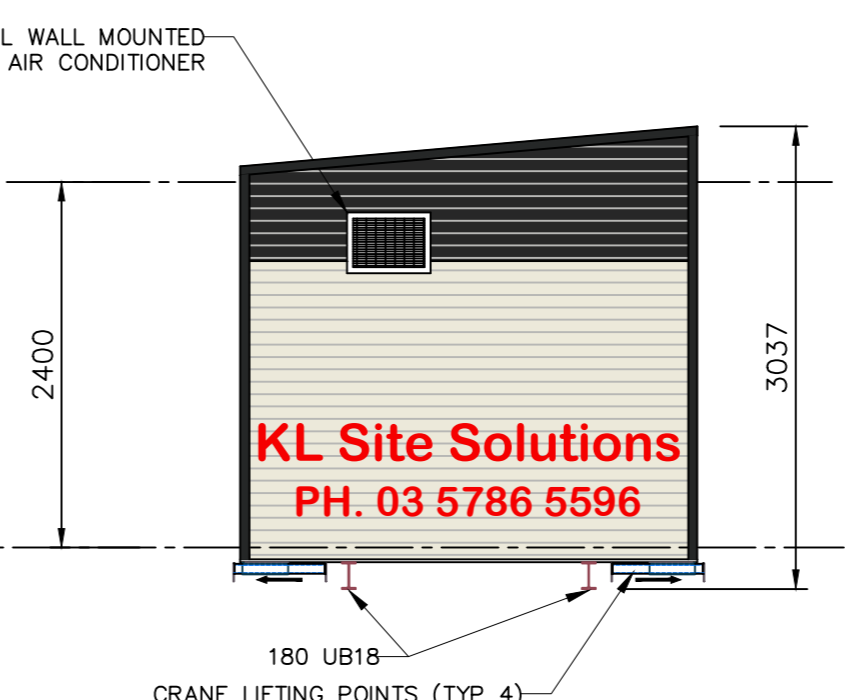

ELEVATION B.

**WINDOW SCHEDULE HxW**  
530x1800 ALUMINIUM FRAME SLIDING HILIGHT

**LEGEND**

- □ □ □ 2 x 36W FLURO LIGHTS (WITH DIFFUSERS)
- □ □ BATTEN LIGHT FITTING
- ⚡ LIGHT SWITCH
- ⊗ DOUBLE 10 Amp GPO
- ⚡ WEATHER PROOF 10 Amp GPO
- DISTRIBUTION BOARD

- NOTES:**
- PLANS TO BE READ IN CONJUNCTION WITH "KLMSA" STRUCTURAL DRAWINGS & MATERIAL SPECIFICATION. ALL CONSTRUCTION, FIT OUT, EXTERNAL SERVICES AND STRUCTURES MUST BE IN ACCORDANCE WITH ALL AUSTRALIAN STANDARDS AND THE LOCAL AUTHORITIES.
  - 9 LITRE WATER TYPE FIRE EXTINGUISHER TO BE LOCATED ADJACENT TO EXIT DOORS.
  - 2A 20 B(E) DRY CHEMICAL FIRE EXTINGUISHER TO BE LOCATED MINIMUM 2.0M AWAY FROM THE ELECTRICAL SWITCHBOARD.

No	DESCRIPTION	DATE	BY
REVISIONS			

DESIGN APPROVAL  
 CLIENTS SIGNATURE.....  
 KLMSA SIGNATURE.....  
 DATE.....

This drawing and all information thereon is the property of KLMS (Aust) Pty. Ltd. and shall be returned on demand. It is issued on the condition that, except with our written permission, it must not be reproduced, copied or communicated to any other party nor be used for any purpose other than stated in the particular enquiry, order or contract with which it is issued.



12 MARGARET STREET, PHEASANT CREEK, VIC, 3757  
 ALL CORRESPONDENCE: PO Box 51 PHEASANT CREEK, VIC, 3757  
 Email : enquires@klmodular.com.au  
 PH: (03) 5786 5596  
 FAX: (03) 5786 5677

KLMSA JOB CODE:		REV.	○
JOB No. 2045			
DRG. No. 2045-A1			
DRAWN W.PENNEY	TITLE SITE SERVICES		
DESIGNED G.MARSHALL	12.0 x 3.0 METRE MOBILE UNIT WITH 2 CHEMICAL TOILETS		
DATE 08.03.2011			
SCALE 1=50			